


NOTE: TIGHTEN CLAMPS TO AT LEAST 60 LBS. TORQUE.



NOTE: AN ELASTOMERIC SEALANT SHALL BE APPLIED BETWEEN THE SEWER MAIN AND THE FLEXIBLE SADDLE TO ENSURE AN AIR TIGHT CONNECTION.

LOS ALTOS HILLS

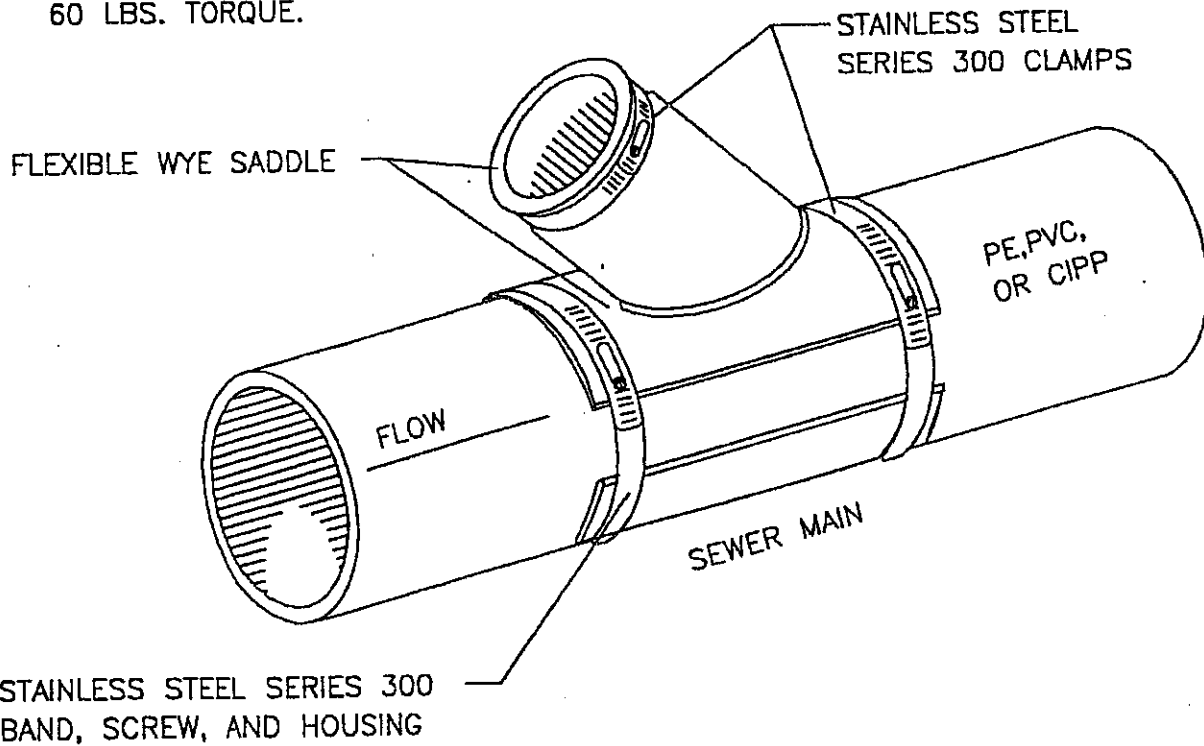

CALIFORNIA

# STRAP ON LATERAL CONNECTION TO HDPE STANDARD DETAIL

SCALE: NONE

DATE: JUNE 6, 2000

DWN: JC

CHK: JR

SHT. 1 OF 1